


DATA SHEET **CARGO LINE+ COMPACT**

Cargo Lifts with attendant



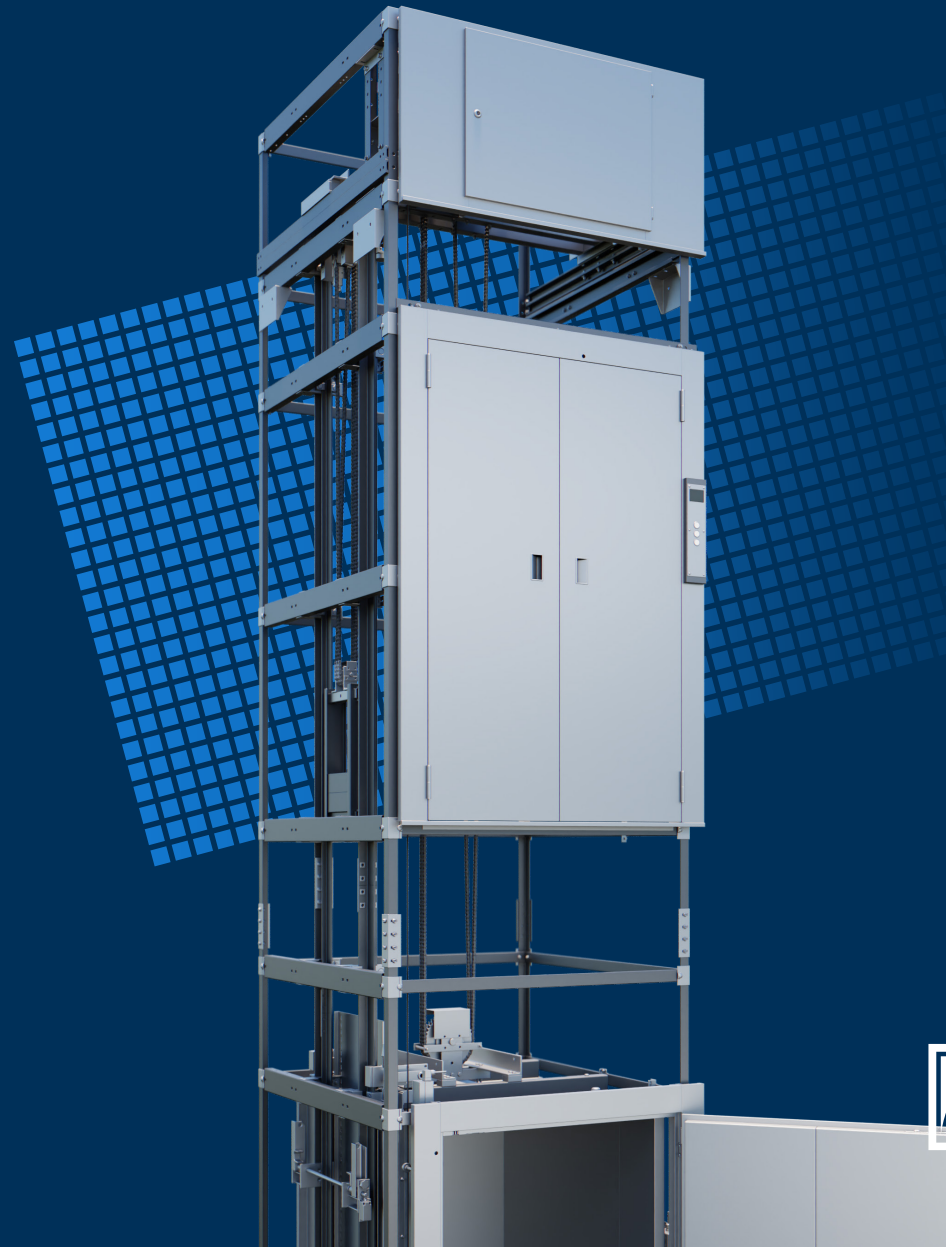

Basic data:

- Load capacity 500 - 1000 kg
- Up to 3 access sides (depending on load capacity)
- Landing doors as single or double-leaf swing door
- Drive unit arrangement at the top or on the side next to the shaft (depending on load capacity and head)
- Nominal speed up to 0.15 m/s
- Optionally with safety gear on the tensioning or balancing weights for accessible spaces under the shaft

Basic equipment:

- Hot-dip galvanised car and landing doors
- Hot-dip galvanised shaft structure for installation in an on-site load-bearing shaft
- Short assembly times due to pre-assembled components
- Drive with compact worm gear
- Microprocessor control completely pre-wired and pluggable in 24 volt technology
- Call and send control including key switch for limited user group
- Interior control as dead man's control activated by key switch
- Safety light grid at the car access
- Preparation for customer emergency call system
- Call acknowledgement, arrival signal and position indicator
- Diagnostic system
- LED cab lighting with integrated emergency lighting
- LED shaft lighting
- Interior roadway sheeting

Optional:

- Landing doors according to EN 81-58: E120, EW60, EI90
- Frequency control
- Overload protection
- Materials and surfaces according to customer requirements
- Intercom systems
- Ship designs
- Water/dust protection (IP)
- Special solutions for reduced shaft conditions
- Deviating car dimensions
- Further special solutions on request

Car dimensions (depending on load capacity):

- Width: 800 – 1500 mm
- Depth: 1100 – 1700 mm
- Height: 2000 mm

